




Sony Xperia U Speaker Replacement

This guide shows how to replace the loudspeaker module

Written By: Bader

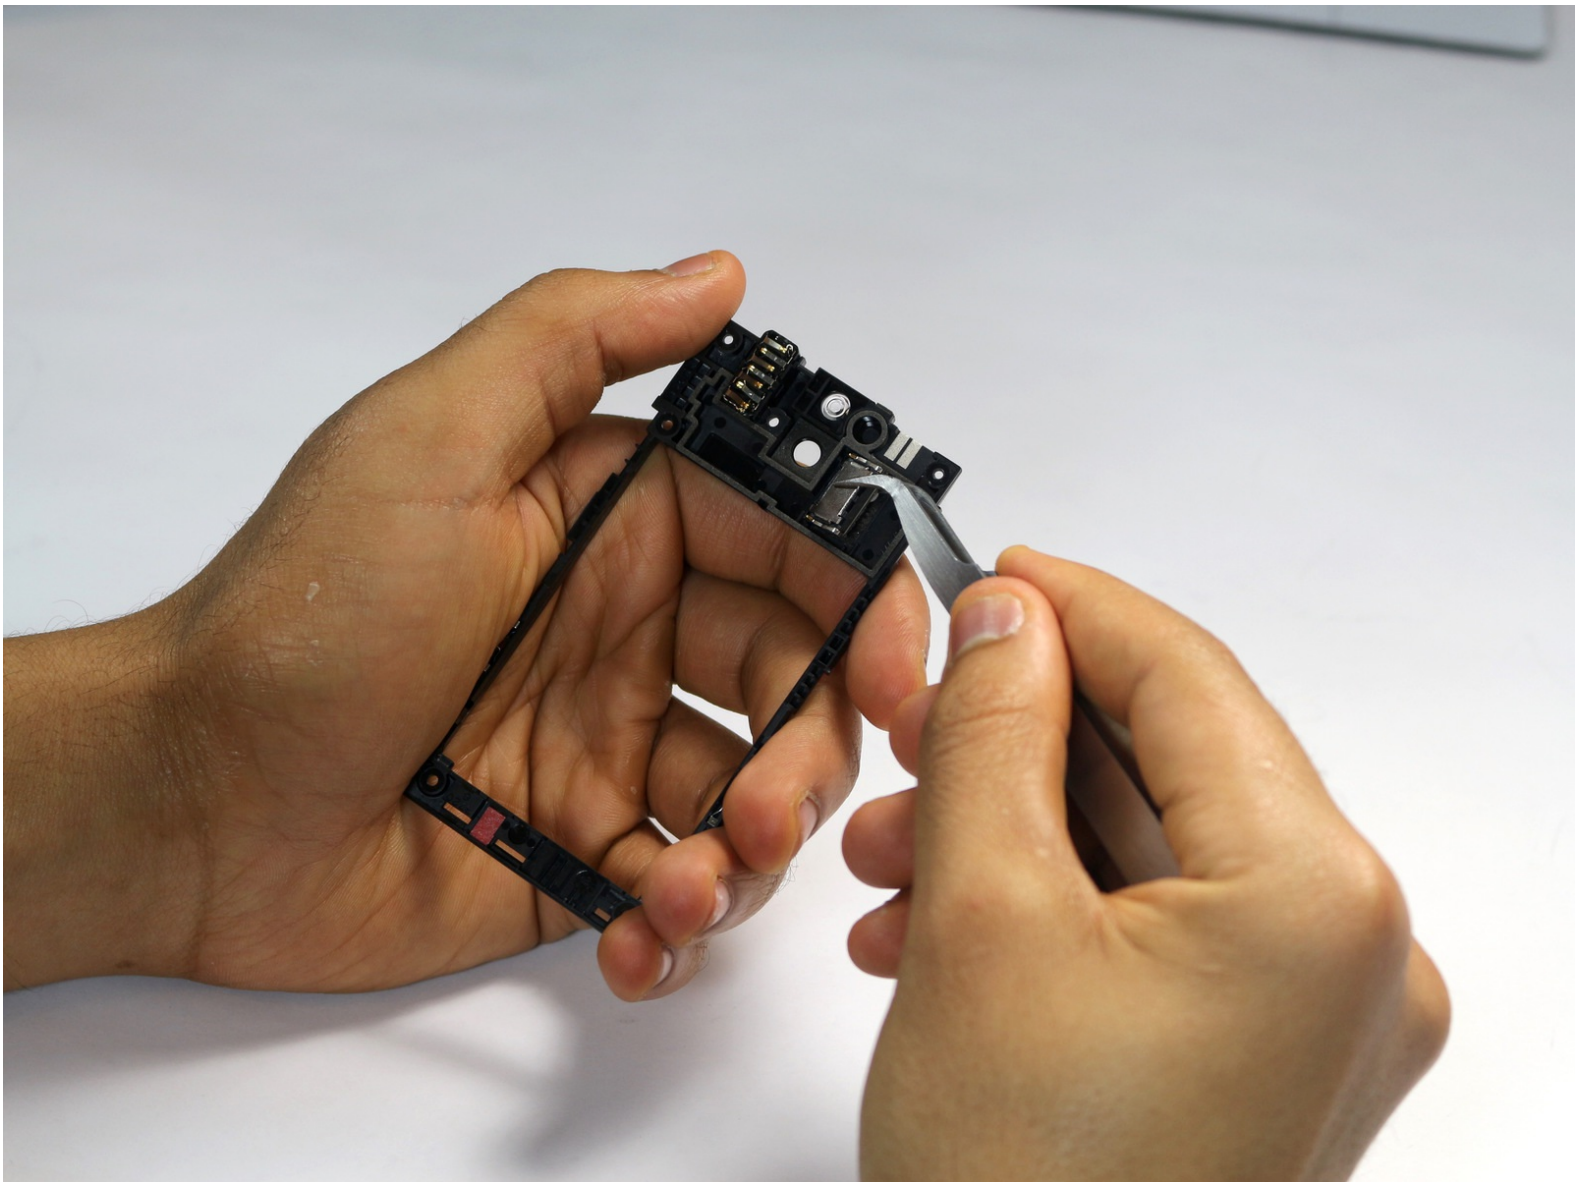

INTRODUCTION


If your phone's speaker is not working properly and needs replacement, follow the steps provided in this guide to guide you through the replacement process.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery

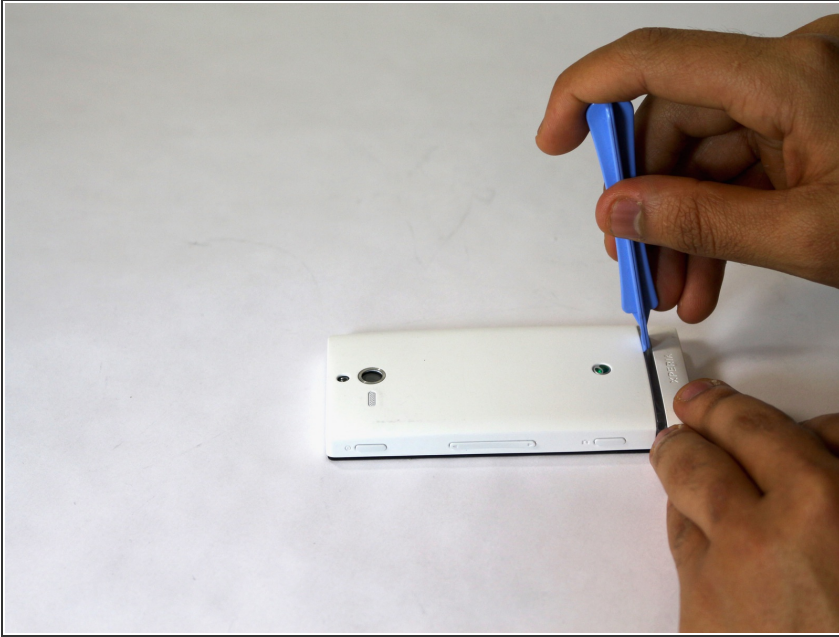


- Set the phone so the screen is facing down.
- Insert the plastic opening tool in the groove located between the body of the phone and the back plate protecting the battery
- Pop the white back plate off with the plastic opening tool.

Step 2



- Insert the plastic opening tool in between the battery and the phone body, which is housing the battery.
- Use the plastic opening tool to pry up on the side of the battery, then remove the battery and set it aside.

Step 3 — Headphone Jack

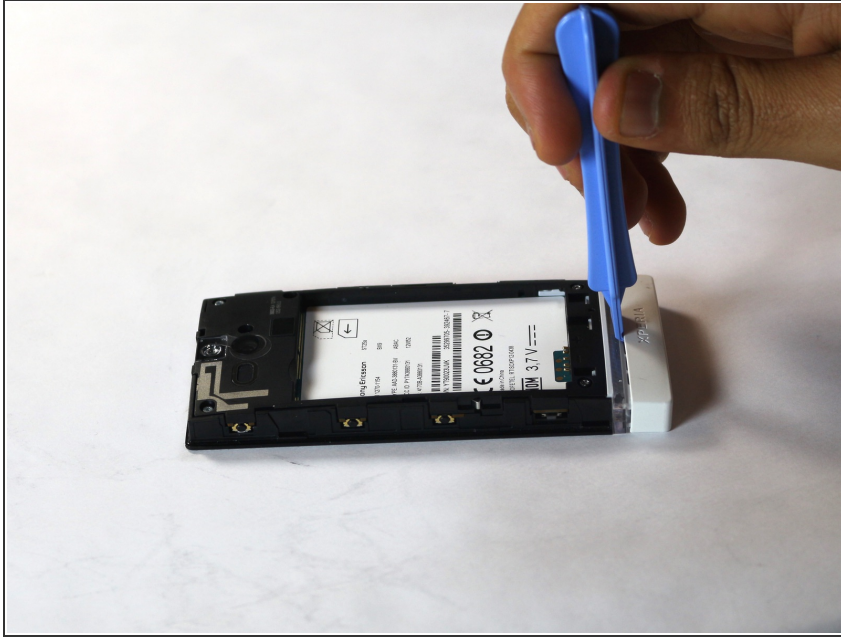


- Insert the plastic opening tool in between the white plastic cover and the body of the phone.
- Pop the plastic cover off by gently pushing forward on the plastic opening tool while it is in between the cover and the phone.

Step 4




- Remove the six size 0 Phillips screws.

Step 5

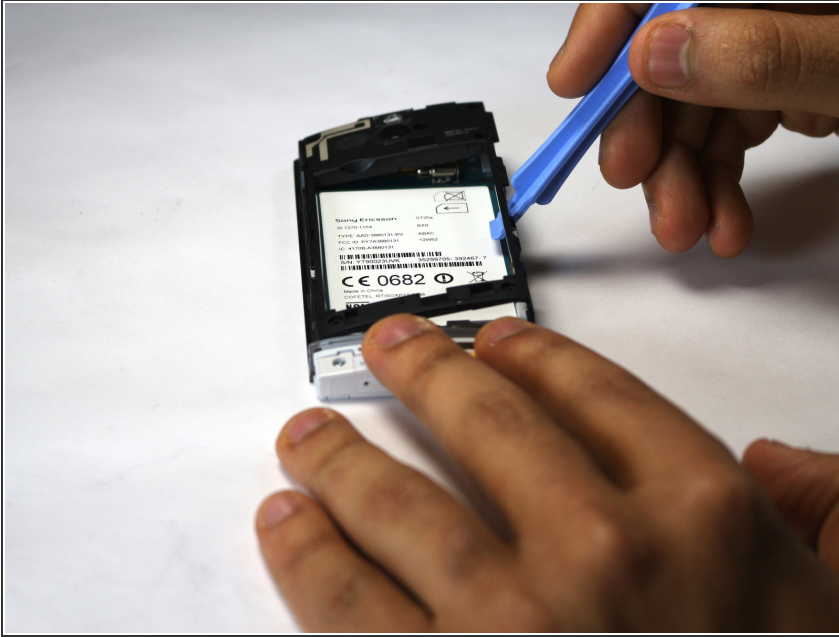


- Insert the plastic opening tool in between the body of the phone and the thin plastic back cover.
- Lift the black back cover off of the body with the plastic tool.

Step 6

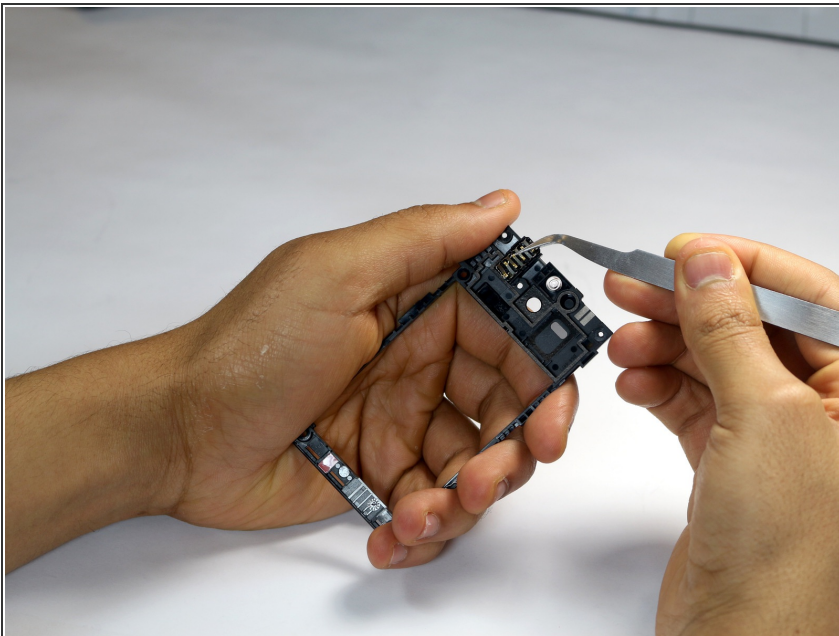

- Locate the earphone jack on the top left of the black plastic back cover.
- Use the tweezers to pinch the earphone jack and remove it from the back cover.

Step 7 — Speaker

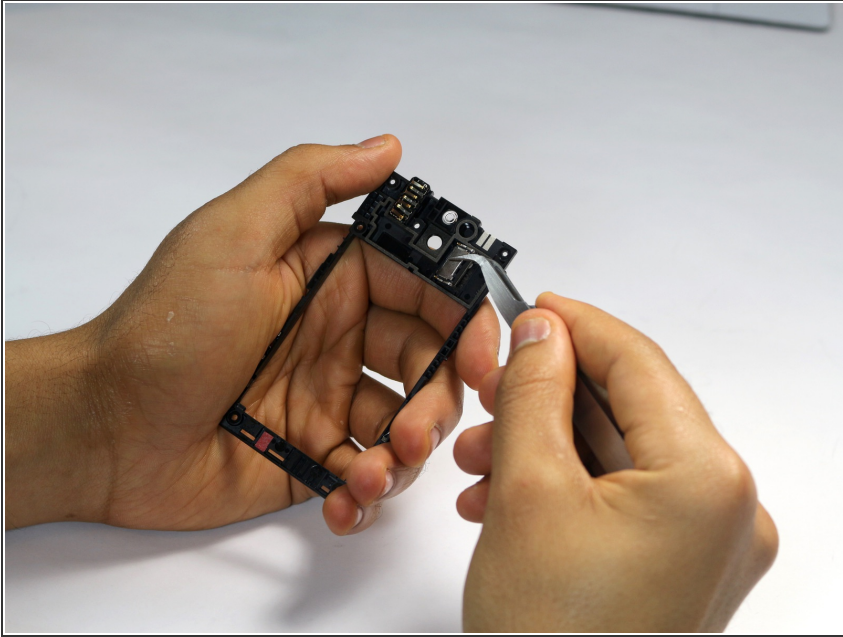

- using pincet remove loudspeaker module

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 10:08:59 PM.